
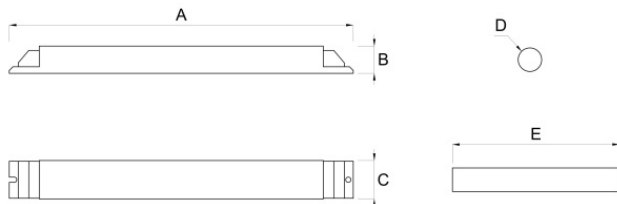


# LED INVERTER

Item code **LH1203**  
Descriptive code **LH04F10ABR-S**

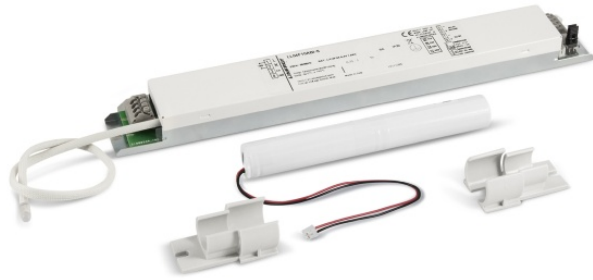

A=278mm B=22mm C=30mm  
D=Ø19mm E=135mm

## Product description

- LED INVERTER SLIM HIGH VOLTAGE 1H REST MODE

## Technical characteristics

- Function: Rest Mode (Self-contained with rest mode)
- Duration: 1h
- Type: M/NM (Maintained when used with an external driver)
- Battery: Li-FePO4 6,4V 1,5Ah
- Battery type: Lithium iron phosphate
- Recharge time: 12h
- Battery status: battery disconnection warning
- Power supply: 230Vac
- Insulation class: I
- Protection degree: IP20
- Working temperature: 0°C to +40°C
- Wire section: 0,75 - 1 mm<sup>2</sup>
- Double relays: for full compatibility with commercial LED drivers
- Colour: White
- Compliant to European standards: EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62384
- Compliant to RoHS2 2011/65/UE
- Glow wire 850 °C
- Installation: inside luminaire

## Compatible lamps

- For LED lighting fixtures with drive having 60-300Vdc and 2A output
- Type: LED
- Light output: 4W
- Max output voltage in emergency: 300 Vdc



An UNI EN ISO 9001 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - www.linergy.it - info@linergy.it

Subject to change without notice. 14/05/2021

## LED INVERTER

Item code **LH1203**

Descriptive code **LH04F10ABR-S**

### Commander



#### **A350**

CONTROLLER FOR THE REMOTE  
MANAGEMENT OF REST MODE



An UNI EN ISO 9001 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - [www.linergy.it](http://www.linergy.it) - [info@linergy.it](mailto:info@linergy.it)

Subject to change without notice. 14/05/2021