




SWING

Item code **SU1201**

Descriptive code **SU30N10AGR**



A=450mm B=50mm C=1mm
D=300mm E=15mm
F=188mm G=225mm

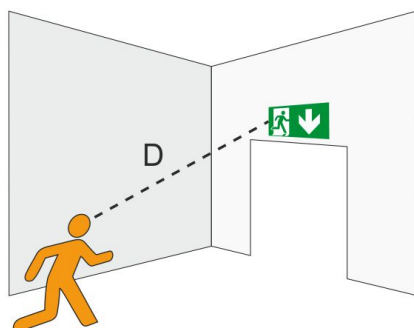

Signaling visibility: 30 meters

Luminaire description

- SWING 30M 1H NM/M IP30 REST MODE RECESSED

Technical characteristics

- Function: Rest Mode (Self-contained with rest mode)
- Duration: 1h
- Type: NM/M (Non-Maintained/Maintained)
- Maintained mode can be turned on/off with an external switch
- Battery: Ni-Cd 4,8V 0,5Ah
- Battery type: Nickel Cadmium
- Recharge time: 12h
- Battery status: battery disconnection warning
- Power supply: 230Vac
- Input power with charged battery: 3,0W
- Insulation class: I
- Protection degree: IP30
- Working temperature: 0°C to +40°C
- Colour: Grey
- Signaling visibility (EN 1838): 30 meters
- Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 1838, EN 7010
- Photobiological safety exempt group according to EN 62471
- Compliant to RoHS2 2011/65/UE
- Glow wire 850 °C
- Kit of pictograms included
- Installation: recessed, suspended
- 5 year warranty

Light source characteristics

- Type: LED
- Lamps: 14 LED
- Color temperature: 6000K



An UNI EN ISO 9001 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - www.linergy.it - info@linergy.it

Subject to change without notice. 14/05/2021

TECHNICAL SHEET

Signalling luminaire

SWING

Item code **SU1201**

Descriptive code **SU30N10AGR**

Standard accessories



A167

PICTOGRAMS FOR SWING

Pictograms



A297

PICTOGRAM FOR SWING DOWN DIRECTION
LEFT

Commander



A350

CONTROLLER FOR THE REMOTE
MANAGEMENT OF REST MODE



An UNI EN ISO 9001 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - www.linergy.it - info@linergy.it

Subject to change without notice. 14/05/2021